

### Benefits

- Savings on your waste collection
- Tidy premises
- Compliance to meet your legal obligations
- Space and time saving
- Ability to segregate waste




# Model 3210

- Front loading
- Fast 13-second cycle time
- Smart logic control
- 12-ton pressure



A= 2150 mm  
 B= 1051 mm  
 C= 843 mm  
 D= 500 mm  
 E= 833 mm  
 F= 2150 mm

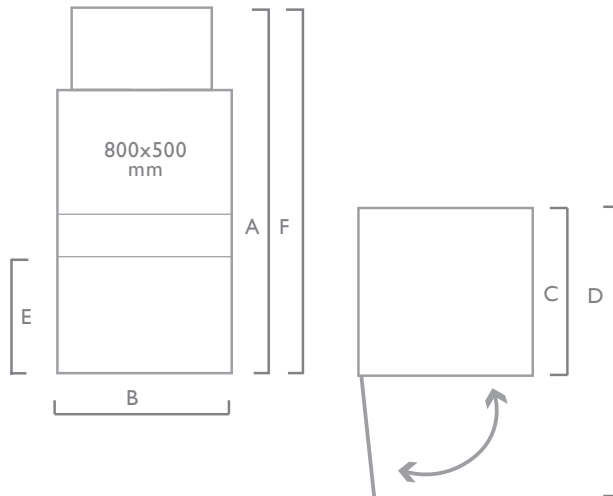

## SPECIFICATIONS

### CYCLE TIME

13 secs

### WEIGHT

Total weight: 660kg (HPI)

### INSTALLATION DIMENSIONS

Height: 2150 mm  
 Width: 1051 mm  
 Depth: 843 mm

### BALE SIZE

Height: 700 mm  
 Width: 800 mm  
 Depth: 600 mm  
 Weight: 80kg cardboard  
 100kg plastic

### LOADING APERTURE

Height: 500 mm  
 Width: 500 mm

### HYDRAULIC DATA

Working pressure: 235 bar  
 Relief pressure: 250 bar  
 Press force: 12 t (120 kN)  
 Piston stroke: 650 mm  
 Oil volume: 17.5 litres

### RECOMMENDED OIL: 0°C TO > 5°C

ISO VG 32-68 5AE

### ELECTRICAL CONNECTION

5 pin CEE-plug , 16 A

### PROTECTION CLASS

IP 55

### NOISE LEVEL

< 62.4 (A)

VOLTAGE	FUSE	IP
3 PHASE, 3X400 V, 50 HZ	16A	55

a **phs** Group company

Tel: 0121 565 7426 Fax: 0121 565 7427  
 Email: orwaksales@phs.co.uk Website: www.orwak.co.uk  
 Orwak Environmental Services Ltd, Unit 6,  
 Alpha Industrial Park, Bevan Way, Smethwick B66 1BZ

Printed on recycled paper