

ORWAK®
**Environmental
Services**

Model 5030

Benefits

- Savings on your waste collection
- Tidy premises
- Space saving




COMPACTORS

Model 5030

- The “bag compactor”
- Bag protected during compaction process
- The flexible compactor



A=1935 mm
 B= 1005 mm
 C=785 mm
 D=1935 mm
 E= 1100 mm

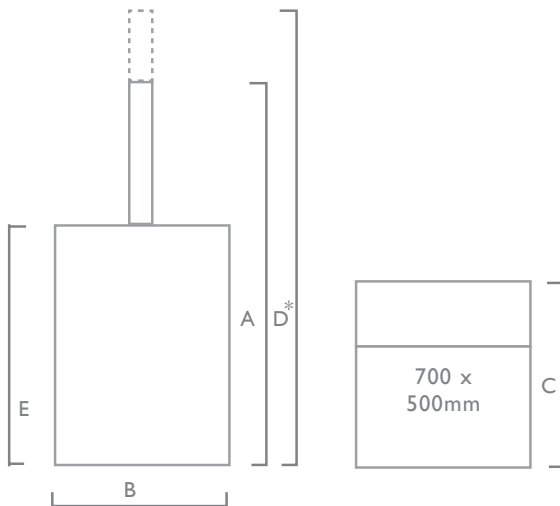

SPECIFICATIONS

CYCLE TIME

36 secs

WEIGHT

Total: 310 kg

MACHINE DIMENSIONS

Height: 1935 mm
 Width: 785 mm
 Length: 10005 mm

INSTALLATION DIMENSIONS

Height: 2660 mm
 Width: 1935 mm
 Length: 2205 mm

FILLING OPENING

500 mm

OIL VOLUME

8,2 litres

RECOMMENDED OIL: TEMP > 5°C

64l ISO VG 22-68 SAE 10

WORKING PRESSURE

Working pressure: 110 bar
 Relief pressure: 140 bar

PRESS FORCE

30000 N (3 ton)

NOISE LEVEL

< 62.7 dB (A)

VOLTAGE

I PHASE, 230 V, 50 HZ

FUSE

10A

MOTOR

0.75 KW, 2780 RPM

IP

55

a **phs** Group company

Tel: 0121 565 7426 Fax: 0121 565 7427
 Email: orwaksales@phs.co.uk Website: www.orwak.co.uk
 Orwak Environmental Services Ltd, Unit 6,
 Alpha Industrial Park, Bevan Way, Smethwick B66 1BZ

Printed on recycled paper